




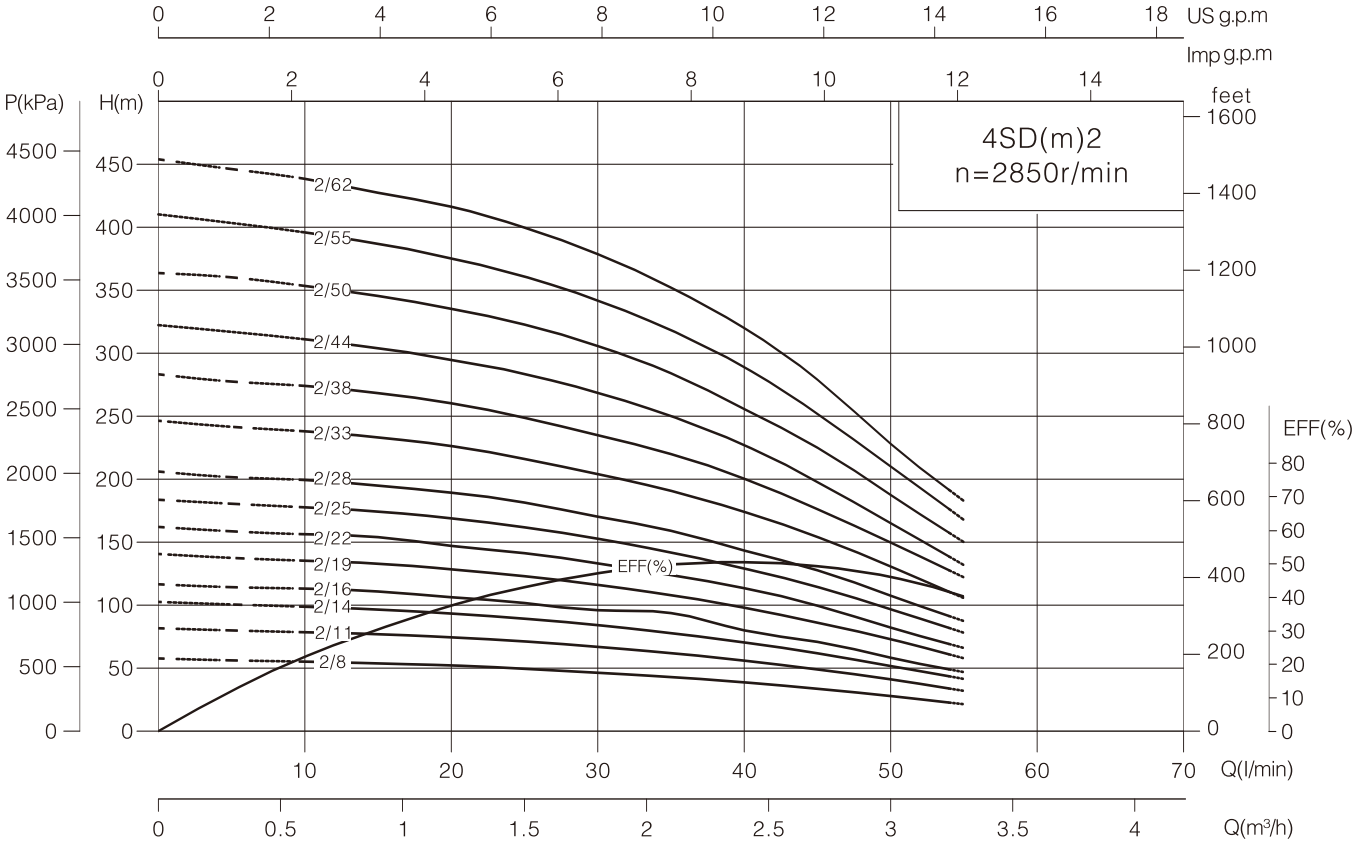


Model		Power		Flow range														Head range (m)	Outlet (inch)
1phase 220V	3phase 380V	kW	HP	m³/h l/min	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3	3.3			
4SDm2/8	-	0.37	0.5	H(m)	58	56	55	54	52	50	46	43	38	34	27	21	55~22	1.25"	
4SDm2/11	-	0.55	0.75		82	80	79	77	74	71	67	62	56	49	41	32	77~34		
4SDm2/14	4SD2/14	0.75	1		102	100	99	97	93	89	84	82	70	62	51	41	99~43		
4SDm2/16	4SD2/16	0.75	1		117	114	113	111	106	102	96	94	80	71	58	47	113~49		
4SDm2/19	4SD2/19	1.1	1.5		140	137	135	133	127	122	115	107	98	86	71	57	135~60		
4SDm2/22	4SD2/22	1.1	1.5		162	159	156	154	147	141	133	124	113	100	82	66	156~69		
4SDm2/25	4SD2/25	1.5	2		184	180	178	174	169	162	152	142	128	114	96	78	178~81		
4SDm2/28	4SD2/28	1.5	2		206	202	199	195	189	181	170	159	143	128	108	87	199~91		
4SDm2/33	4SD2/33	2.2	3		246	241	238	233	226	216	204	191	174	153	130	106	238~110		
4SDm2/38	4SD2/38	2.2	3		283	278	274	268	260	249	235	220	200	176	150	122	274~127		
-	4SD2/44	3	4		320	317	311	304	295	284	269	250	225	198	165	132	311~137		
-	4SD2/50	3	4		364	360	353	345	335	323	306	284	256	225	188	150	353~156		
-	4SD2/55	4	5.5		410	403	396	386	376	361	342	318	289	252	206	165	396~175		
-	4SD2/62	4	5.5		454	446	438	427	416	400	379	352	320	279	228	183	438~190		

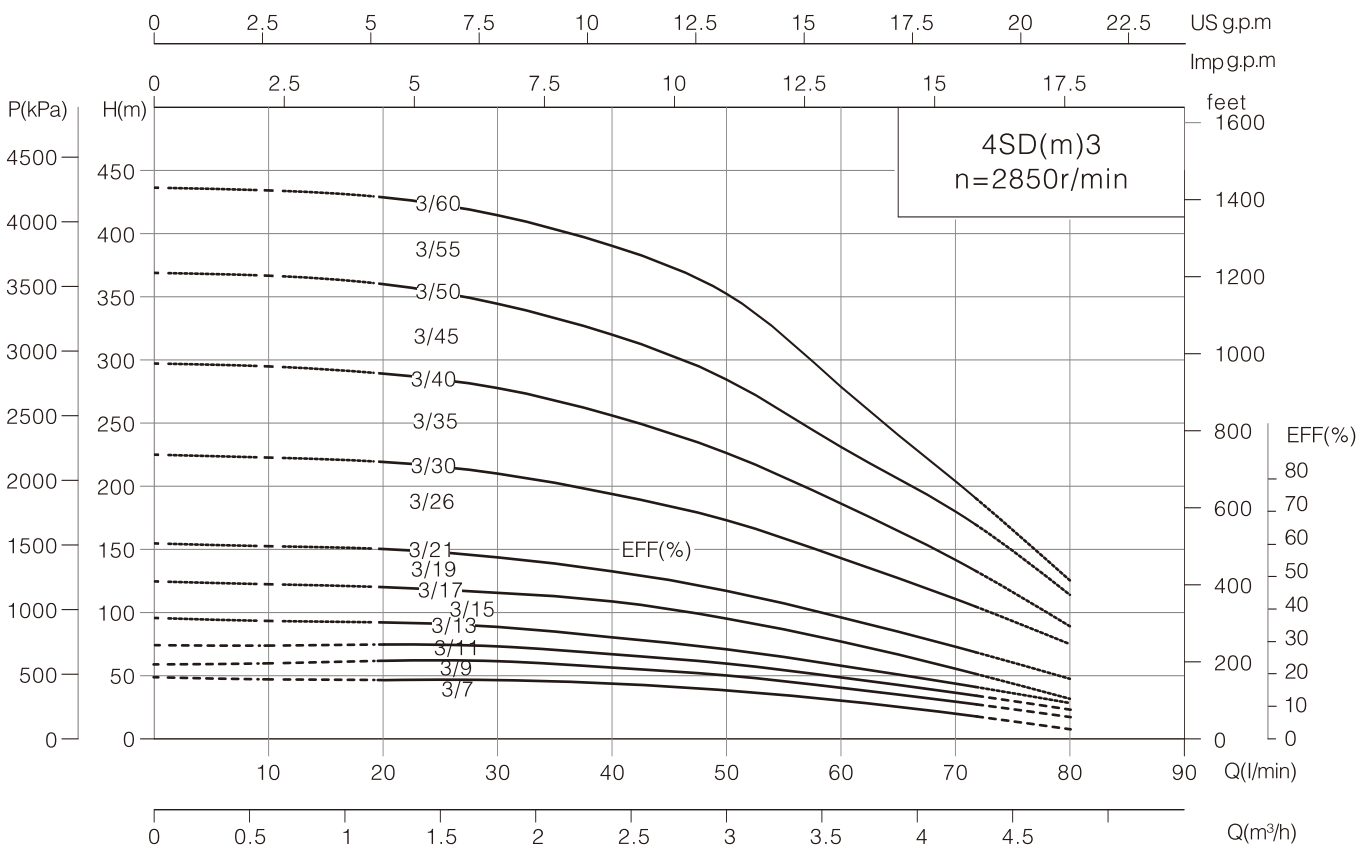


Model		Power		Flow range										Head range (m)	Outlet (inch)
1phase 220V	3phase 380V	kW	HP	m³/h l/min	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8		
4SDm3/7	-	0.37	0.5	H(m)	49	48	47	44	40	35	28	23	12	47 ~ 25	1.25"
4SDm3/9	-	0.55	0.75		65	64	63	60	55	48	40	30	19	63 ~ 35	
4SDm3/11	4SD3/11	0.75	1		81	79	78	75	68	60	49	37	24	78 ~ 43	
4SDm3/13	4SD3/13	0.75	1		96	93	92	89	80	71	58	44	28	92 ~ 51	
4SDm3/15	4SD3/15	1.1	1.5		110	108	106	102	96	84	68	49	28	106 ~ 59	
4SDm3/17	4SD3/17	1.1	1.5		125	122	120	116	109	95	77	56	32	120 ~ 67	
4SDm3/19	4SD3/19	1.5	2		140	138	136	130	120	106	87	66	43	136 ~ 77	
4SDm3/21	4SD3/21	1.5	2		155	153	150	144	133	117	96	73	48	150 ~ 85	
4SDm3/26	4SD3/26	2.2	3		195	193	190	182	168	150	124	96	65	190 ~ 111	
4SDm3/30	4SD3/30	2.2	3		225	223	219	210	194	173	143	111	75	219 ~ 127	
-	4SD3/35	3	4		260	258	253	243	224	198	163	124	78	253 ~ 144	
-	4SD3/40	3	4		297	295	289	278	256	226	186	142	89	289 ~ 165	
-	4SD3/45	4	5.5		332	330	324	310	288	256	208	162	107	324 ~ 185	
-	4SD3/50	4	5.5		369	367	360	344	320	284	231	180	114	360 ~ 206	
-	4SD3/55	5.5	7.5		400	398	393	380	355	323	250	187	115	393 ~ 219	
-	4SD3/60	5.5	7.5		436	434	429	415	387	352	273	204	125	429 ~ 241	

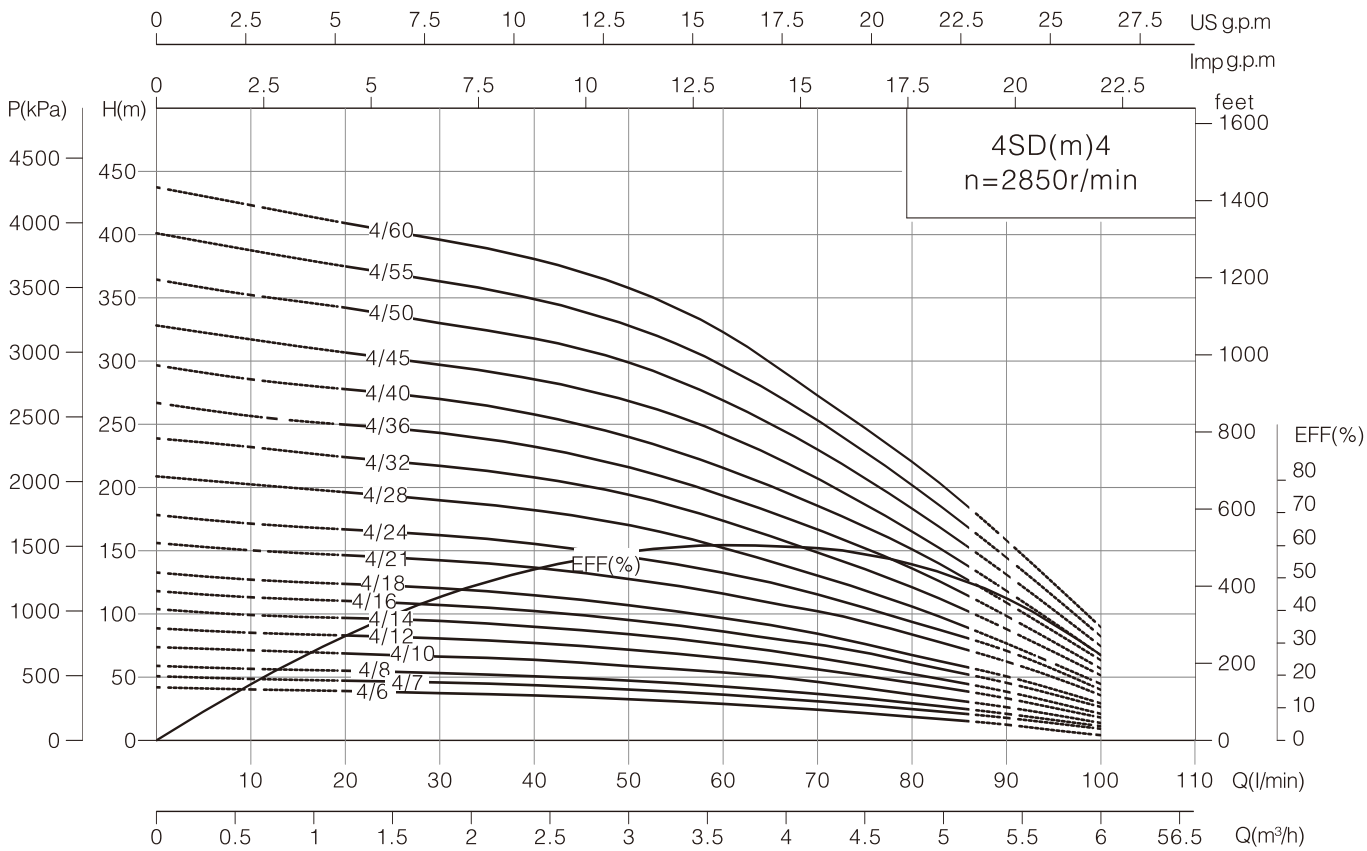


Model		Power		Flow range												Head range	Outlet
1phase	3phase	kW	HP	m³/h	0	0.6	1.2	1.8	2.4	3	3.6	4.2	4.8	5.4	6	(m)	(inch)
220V	380V			l/min	0	10	20	30	40	50	60	70	80	90	100		
4SDm4/6	-	0.37	0.5	H(m)	42	40	39	37	35	32	29	24	19	12	4	39 ~ 15	1.25"
4SDm4/7	-	0.55	0.75		50	48	47	46	44	40	36	31	25	18	9	47 ~ 20	
4SDm4/8	4SD4/8	0.75	1		59	57	55	53	51	47	43	37	29	21	11	55 ~ 24	
4SDm4/10	4SD4/10	0.75	1		74	71	69	66	64	59	54	46	36	26	14	69 ~ 30	
4SDm4/12	4SD4/12	1.1	1.5		89	85	83	81	77	72	65	56	45	33	18	83 ~ 38	
4SDm4/14	4SD4/14	1.1	1.5		104	99	97	95	90	84	76	65	53	39	21	97 ~ 43	
4SDm4/16	4SD4/16	1.5	2		118	113	110	107	102	95	86	75	60	45	26	110 ~ 51	
4SDm4/18	4SD4/18	1.5	2		133	127	124	120	115	107	97	84	68	51	29	124 ~ 57	
4SDm4/21	4SD4/21	2.2	3		156	150	146	142	136	127	116	101	82	62	35	146 ~ 70	
4SDm4/24	4SD4/24	2.2	3		178	171	167	162	155	145	133	115	94	71	40	167 ~ 79	
-	4SD4/28	3	4		209	203	196	190	182	170	152	130	106	77	45	196 ~ 87	
-	4SD4/32	3	4		239	232	224	217	208	194	174	149	121	88	51	224 ~ 100	
-	4SD4/36	4	5.5		267	257	250	243	232	216	194	167	136	98	57	250 ~ 112	
-	4SD4/40	4	5.5		297	286	278	270	258	240	216	186	151	109	63	278 ~ 124	
-	4SD4/45	5.5	7.5		328	317	308	297	286	269	242	207	165	118	67	308 ~ 134	
-	4SD4/50	5.5	7.5		364	352	342	330	318	299	269	230	183	131	74	342 ~ 149	
-	4SD4/55	7.5	10		401	388	375	363	349	328	296	250	202	145	82	375 ~ 164	
-	4SD4/60	7.5	10		437	423	409	396	381	358	323	273	220	158	89	409 ~ 180	

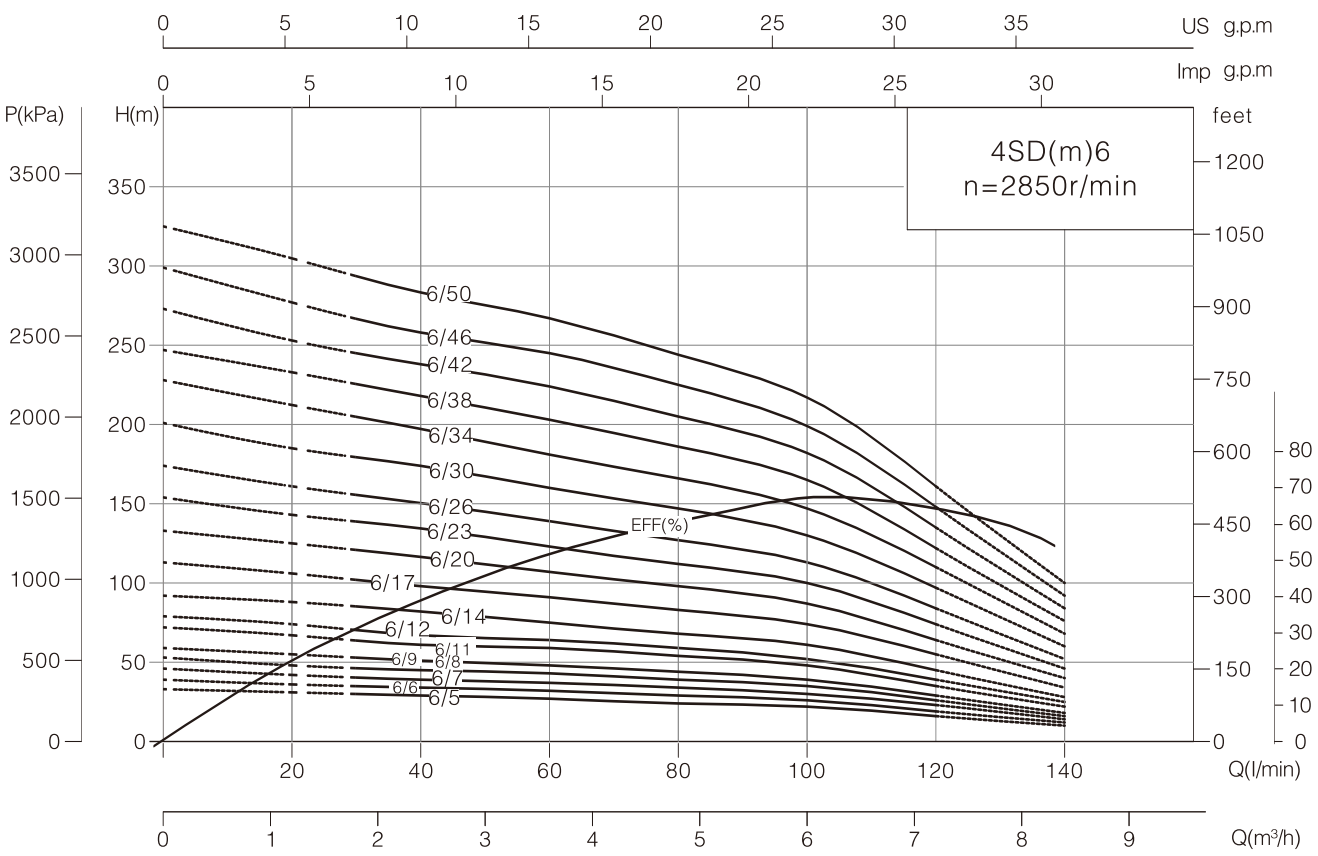


Model		Power		Flow range									Head range (m)	Outlet (inch)
1phase 220V	3phase 380V	kW	HP	m³/h l/min	0	1.2	2.4	3.6	4.8	6	7.2	8.4		
4SDm6/5	-	0.37	0.5	H(m)	33	31	29	27	24	22	16	10	30 ~ 16	1.5"
4SDm6/6	-	0.55	0.75		39	36	34	32	29	26	19	12	35 ~ 19	
4SDm6/7	4SD6/7	0.75	1		46	42	39	37	34	30	23	14	40 ~ 23	
4SDm6/8	4SD6/8	0.75	1		53	48	45	43	39	35	26	16	46 ~ 26	
4SDm6/9	4SD6/9	1.1	1.5		59	55	51	48	44	39	29	18	53 ~ 29	
4SDm6/11	4SD6/11	1.1	1.5		72	67	61	59	54	48	35	22	64 ~ 35	
4SDm6/12	4SD6/12	1.5	2		79	74	67	64	59	52	39	24	70 ~ 39	
4SDm6/14	4SD6/14	1.5	2		92	86	78	75	68	61	45	28	85 ~ 45	
4SDm6/17	4SD6/17	2.2	3		113	106	98	91	83	74	55	34	102 ~ 55	
4SDm6/30	4SD6/20	2.2	3		133	125	113	107	98	87	64	40	121 ~ 64	
-	4SD6/23	3	4		154	142	132	123	112	100	74	46	139 ~ 74	
-	4SD6/26	3	4		174	161	150	139	127	113	84	52	156 ~ 84	
-	4SD6/30	4	5.5		201	185	172	160	147	130	97	60	179 ~ 97	
-	4SD6/34	4	5.5		228	210	192	181	166	147	110	68	205 ~ 110	
-	4SD6/38	5.5	7.5		247	229	220	203	186	165	122	76	226 ~ 122	
-	4SD6/42	5.5	7.5		273	253	238	224	205	182	135	84	245 ~ 135	
-	4SD6/46	7.5	10		299	280	260	245	225	199	148	92	267 ~ 148	
-	4SD6/50	7.5	10		325	303	284	267	244	217	161	100	294 ~ 161	

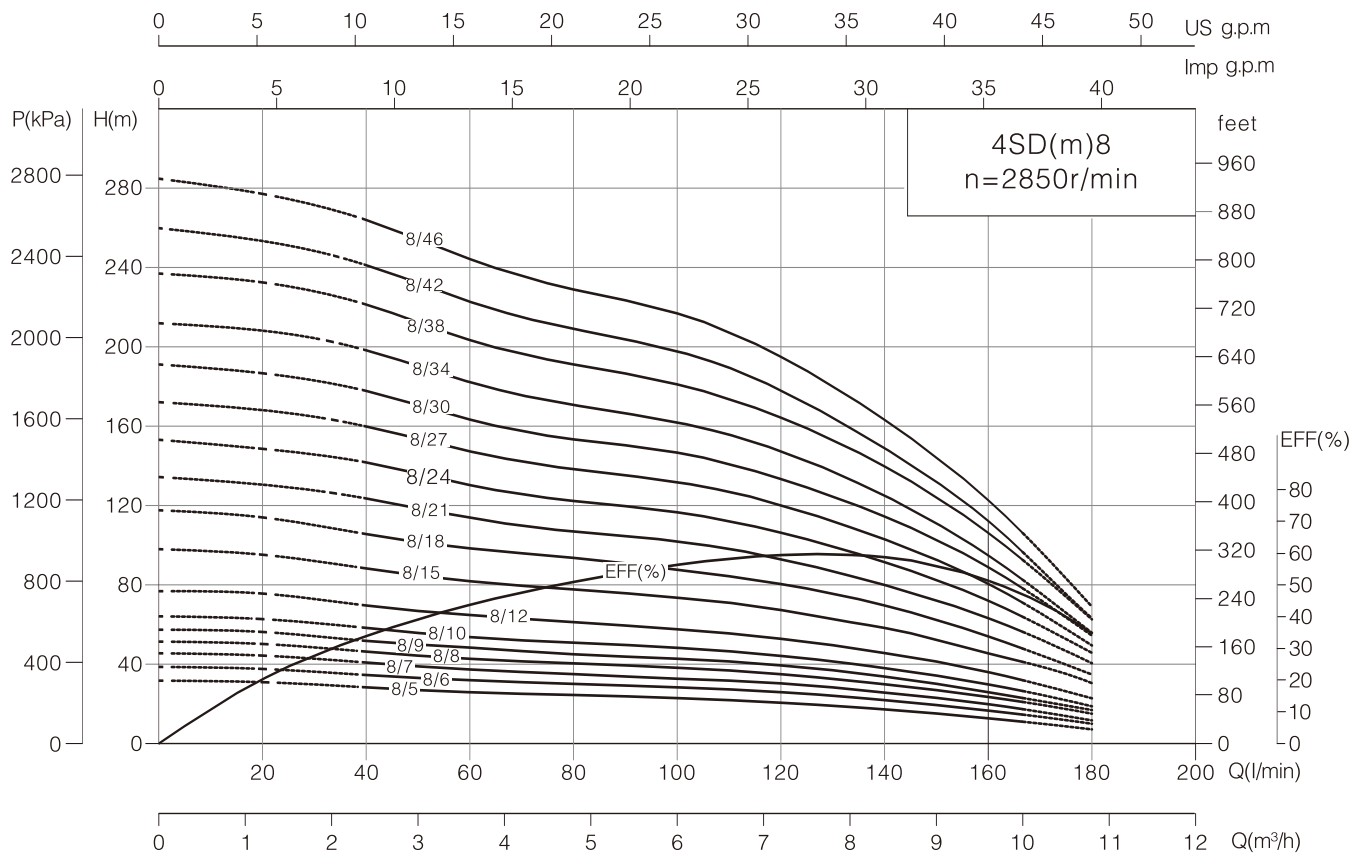

Model		Power		Flow range												Head range (m)	Outlet (inch)
1phase	3phase	kW	HP	m³/h	0	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8			
220V	380V			l/min	0	20	40	60	80	100	120	140	160	180			
4SDm8/5	-	0.55	0.75	H(m)	32	31	28	26	25	23	21	17	13	7	28 ~ 11	2"	
4SDm8/6	4SD8/6	0.75	1		39	38	35	32	30	28	26	22	17	10	35 ~ 15		
4SDm8/7	4SD8/7	0.75	1		46	44	41	37	35	33	30	26	20	12	41 ~ 17		
4SDm8/8	4SD8/8	1.1	1.5		51	50	46	43	40	38	35	30	23	15	46 ~ 21		
4SDm8/9	4SD8/9	1.1	1.5		57	56	52	48	45	43	39	34	26	17	52 ~ 23		
4SDm8/10	4SD8/10	1.5	2		64	63	58	54	51	48	44	38	30	19	58 ~ 26		
4SDm8/12	4SD8/12	1.5	2		77	76	70	65	61	58	53	46	36	23	70 ~ 32		
4SDm8/15	4SD8/15	2.2	3		98	95	88	82	78	73	67	58	45	29	88 ~ 41		
4SDm8/18	4SD8/18	2.2	3		118	114	106	98	94	88	80	70	54	35	106 ~ 48		
-	4SD8/21	3	4		134	130	124	114	107	102	93	80	63	40	124 ~ 56		
-	4SD8/24	3	4		153	149	142	130	122	117	106	91	72	46	142 ~ 64		
-	4SD8/27	4	5.5		172	168	160	147	138	132	120	103	80	49	160 ~ 71		
-	4SD8/30	4	5.5		191	187	178	163	153	147	133	114	89	54	178 ~ 78		
-	4SD8/34	5.5	7.5		212	208	198	182	171	162	147	125	95	56	198 ~ 83		
-	4SD8/38	5.5	7.5		237	232	221	203	191	181	164	140	106	62	221 ~ 93		
-	4SD8/42	7.5	10		260	253	241	223	209	198	178	149	112	63	241 ~ 97		
-	4SD8/46	7.5	10		285	277	264	244	229	217	195	163	123	69	264 ~ 106		

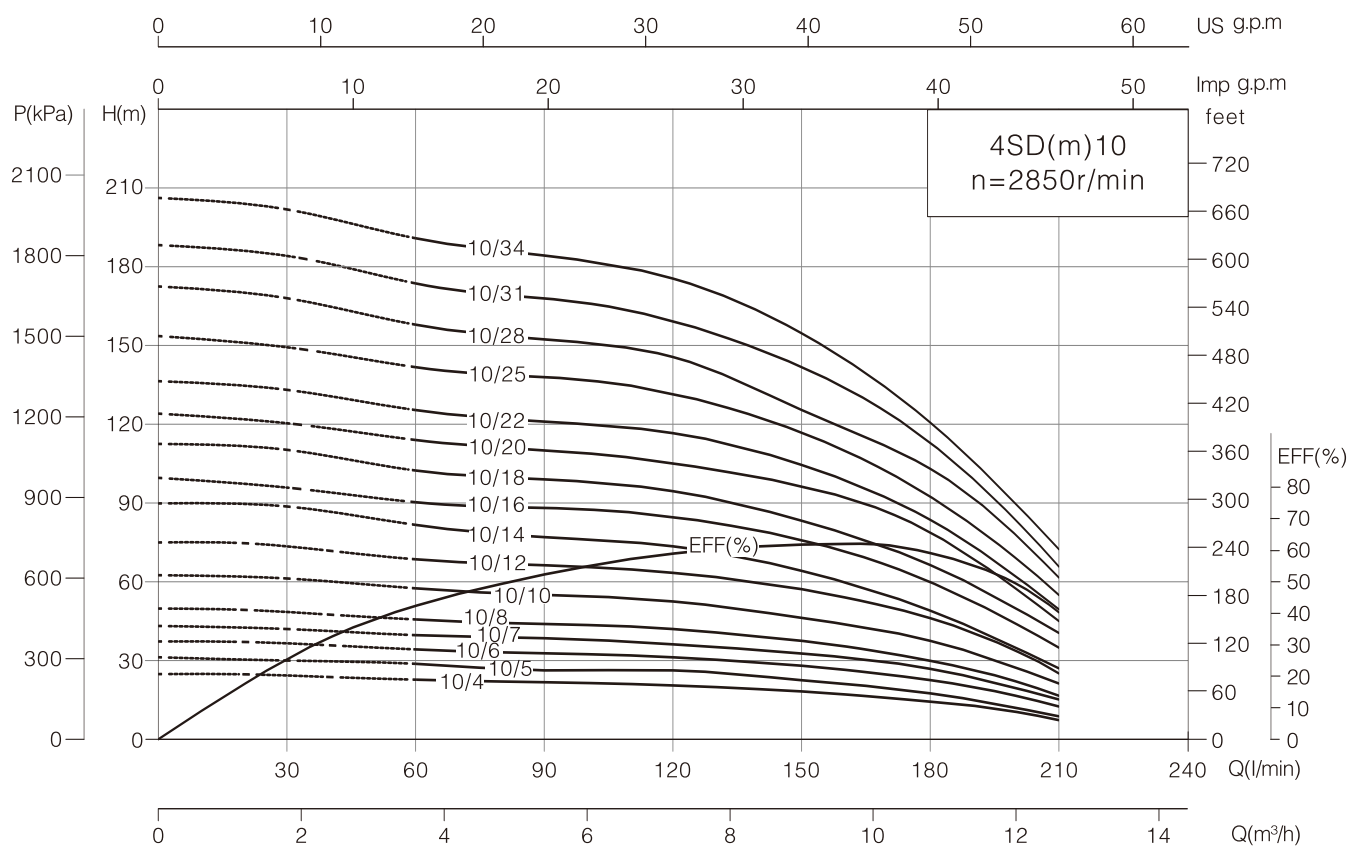

Model		Power		Flow range									Head range (m)	Outlet (inch)
1phase	3phase	kW	HP	m³/h	0	1.8	3.6	5.4	7.2	9	10.8	12.6		
220V	380V					l/min	0	30	60	90	120	150	180	210
4SDm10/4	4SD10/4	0.75	1	H(m)	25	24	23	22	21	18	14	7	23 ~ 7	2"
4SDm10/5	4SD10/5	0.75	1		31	30	29	27	26	23	18	9	29 ~ 9	
4SDm10/6	4SD10/6	1.1	1.5		37	36	34	33	31	28	23	13	34 ~ 13	
4SDm10/7	4SD10/7	1.1	1.5		43	42	40	39	36	33	27	15	40 ~ 15	
4SDm10/8	4SD10/8	1.5	2		50	49	46	44	42	37	30	17	47 ~ 17	
4SDm10/10	4SD10/10	1.5	2		63	61	58	55	53	46	38	21	59 ~ 21	
4SDm10/12	4SD10/12	2.2	3		77	76	70	66	63	55	42	22	70 ~ 22	
4SDm10/14	4SD10/14	2.2	3		90	89	82	77	74	64	49	26	84 ~ 26	
-	4SD10/16	3	4		100	98	91	88	84	74	59	36	92 ~ 36	
-	4SD10/18	3	4		113	110	102	99	95	83	66	41	105 ~ 41	
-	4SD10/20	4	5.5		124	121	114	110	106	95	76	45	116 ~ 45	
-	4SD10/22	4	5.5		136	133	125	121	117	105	84	50	128 ~ 50	
-	4SD10/25	5.5	7.5		154	150	141	136	130	116	92	55	144 ~ 55	
-	4SD10/28	5.5	7.5		172	168	158	152	146	125	103	62	161 ~ 62	
-	4SD10/31	7.5	10		188	184	174	168	160	141	110	66	177 ~ 66	
-	4SD10/34	7.5	10		206	202	191	184	175	155	121	72	194 ~ 72	

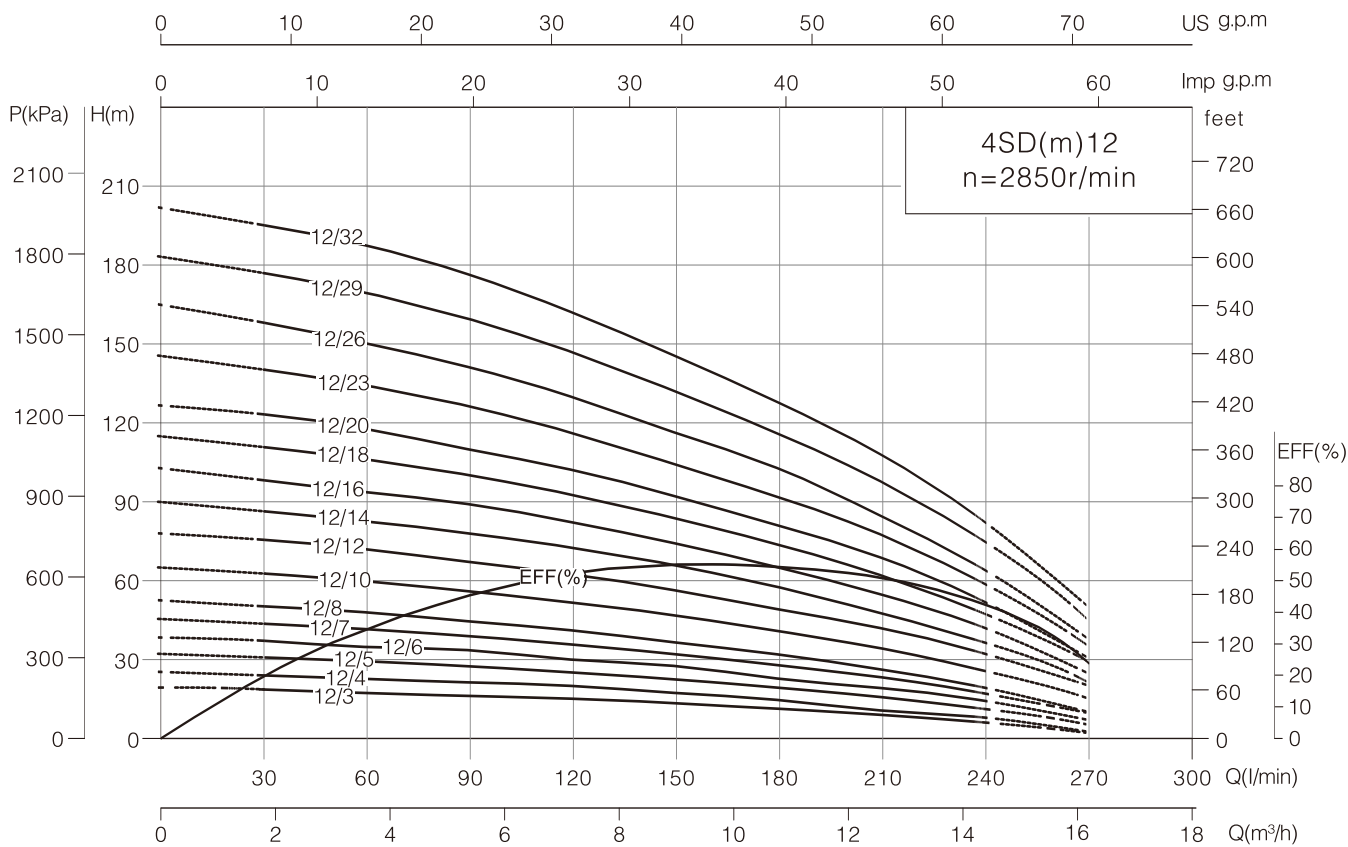

Model		Power		Flow range											Head range (m)	Outlet (inch)
1phase	3phase	kW	HP	m³/h	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16.2		
220V	380V					l/min	0	30	60	90	120	150	180	210	240	270
4SDm12/3	4SD12/3	0.75	1	H(m)	19	18	17	16	15	13	11	8	6	2	18 ~ 7	2"
4SDm12/4	4SD12/4	0.75	1		25	24	23	21	20	17	15	11	8	3	23 ~ 9	
4SDm12/5	4SD12/5	1.1	1.5		32	31	29	28	25	23	19	16	12	6	30 ~ 12	
4SDm12/6	4SD12/6	1.1	1.5		38	37	35	34	30	28	23	19	14	7	35 ~ 16	
4SDm12/7	4SD12/7	1.5	2		46	44	42	39	36	32	28	23	17	9	42 ~ 19	
4SDm12/8	4SD12/8	1.5	2		53	50	48	45	41	37	32	26	19	10	49 ~ 21	
4SDm12/10	4SD12/10	2.2	3		65	63	60	56	52	47	41	35	27	17	60 ~ 28	
4SDm12/12	4SD12/12	2.2	3		78	76	72	67	62	56	49	42	32	20	73 ~ 35	
-	4SD12/14	3	4		90	86	82	78	72	65	57	48	37	22	83 ~ 39	
-	4SD12/16	3	4		103	98	94	89	82	74	65	55	42	25	95 ~ 45	
-	4SD12/18	4	5.5		114	111	106	99	92	83	73	62	47	28	107 ~ 51	
-	4SD12/20	4	5.5		127	123	118	110	102	92	81	69	52	31	119 ~ 56	
-	4SD12/23	5.5	7.5		146	140	133	125	115	103	91	75	57	34	136 ~ 63	
-	4SD12/26	5.5	7.5		165	158	150	141	130	116	103	85	64	38	152 ~ 69	
-	4SD12/29	7.5	10		183	177	170	160	147	132	116	98	75	46	171 ~ 80	
-	4SD12/32	7.5	10		202	195	188	177	162	146	128	108	83	51	189 ~ 88	